

Presence detector - Professional Line

IS 3360 40m

V3 KNX - surface, sq. black

EAN 4007841 068561

Article number 068561



infrared sensor
360°



max. 20 m



KNX



IP54



2 - 1000 lux



1 - 255 min



ideal 2,5 - 4 m

Teach

Teach mode



energy saving

5 years

manufacturer's
warranty
[steinel-professional.de/garantie](https://www.steinel.de/garantie)

Function description

Higher, further, faster. Infrared presence detector IS 3360 for indoors and out, ideal for watching over high spaces and large areas, such as multi-storey and underground car parks, installation height up to 4 m, 360° angle of coverage, reach 20 m max. (tangential), large terminal compartment for easy installation. Available either in round or square surface-mounted and concealed version.

IS 3360 40m

V3 KNX - surface, sq. black

EAN 4007841 068561

Article number 068561



Technical specifications

Type	Motion and Presence Detector
Dimensions (L x W x H)	65 x 95 x 95 mm
Power supply, detail	KNX bus
Sensor Technology	passive infrared
Application, place	Outdoors, Indoors
Installation site	ceiling
Installation	Surface wiring
Mounting height	2,50 – 4,00 m
Reach, radial	Ø 8 m (50 m ²)
Reach, tangential	Ø 40 m (1257 m ²)
Reach, presence	Ø 3 m (7 m ²)
Detection angle	360 °
Angle of aperture	180 °
Switching zones	1416 switching zones
Optimum mounting height	2,8 m
Mechanical scalability	No
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No

Twilight setting TEACH	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Constant-lighting control	Yes
Basic light level function	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function, Logic gate
With bus coupling	Yes
Settings via	ETS software, Remote control, Bus, Smart Remote
Interconnection	Yes
Type of interconnection	Master/slave
IP-rating	IP54
Material	Plastic
Ambient temperature	-20 – 50 °C
Application, room	production facilities, recreation room, changing room, function room / ancillary room, sports hall, reception / lobby, stairwell, WC / washroom, multi-storey / underground car park, outdoors, warehouse, Indoors
Colour	black
Colour, RAL	9005
Manufacturer's Warranty	5 years
Version	KNX - surface, sq. black
PU1, EAN	4007841068561

Accessories

EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 592912	User remote control RC7 KNX
EAN 4007841 009151	Remote control Smart Remote

IS 3360 40m


V3 KNX - surface, sq. black

EAN 4007841 068561

Article number 068561



Detection Zone

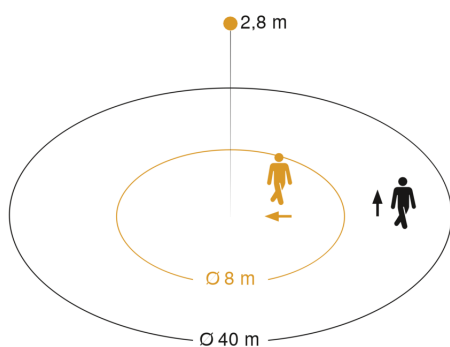

Mögliche Montagehöhe: 2,50 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

